

# L-Series Linear Valve Actuator



**Shafer™**

  
**EMERSON™**  
Process Management

# APPLICATIONS

## ***For operation of rising stem type valves.***

- Gate valve applications on natural gas pipelines. The actuators are powered by natural gas using gas over oil tanks.
  - Natural gas transmission lines
  - Emergency shutdown
  - Linebreak protection
- Gate valve applications on crude oil or products pipelines. The actuators are typically powered hydraulically or by nitrogen pressure vessels.
- Rising stem ball valves.
- Spring return or fail-safe applications.



# CAPABILITIES


- Double acting or spring return operation.
- Thrust output range 900 to 600,000 lbs. (408 to 272,155 kg).
- Linear motion range to 72 inches (182.9 cm).
- Power supply pressure range 50 to 3,000 psi (3.4 to 207 bars).
  - Hydraulic, gas/hydraulic, pneumatic
- Ambient temperature range:
  - -20°F to 250°F (-29°C to 121°C) Standard
  - -50°F to 250°F (-45°C to 121°C) Optional

# FEATURES

- The hydraulic piston generates dependable and efficient thrust which acts directly on the valve stem.
- The linear motion is always smooth, even at rapid operating speeds.
- The actuator is mounted directly on the valve, centered on the valve stem for rigid support and precise alignment. The piston is threaded directly to the valve stem which permits installation on new or in-service valves.
- The actuator absorbs all end of stroke thrust to protect the valve.
- Operating speed is easily controlled. Hydraulic snubbers are used to slow the speed, at the end of stroke, on wedge type gate valves.
- The double holding valve hydraulically locks the actuator in any desired position, without drift.



**Double holding valve, speed control and hand pump assembly.**

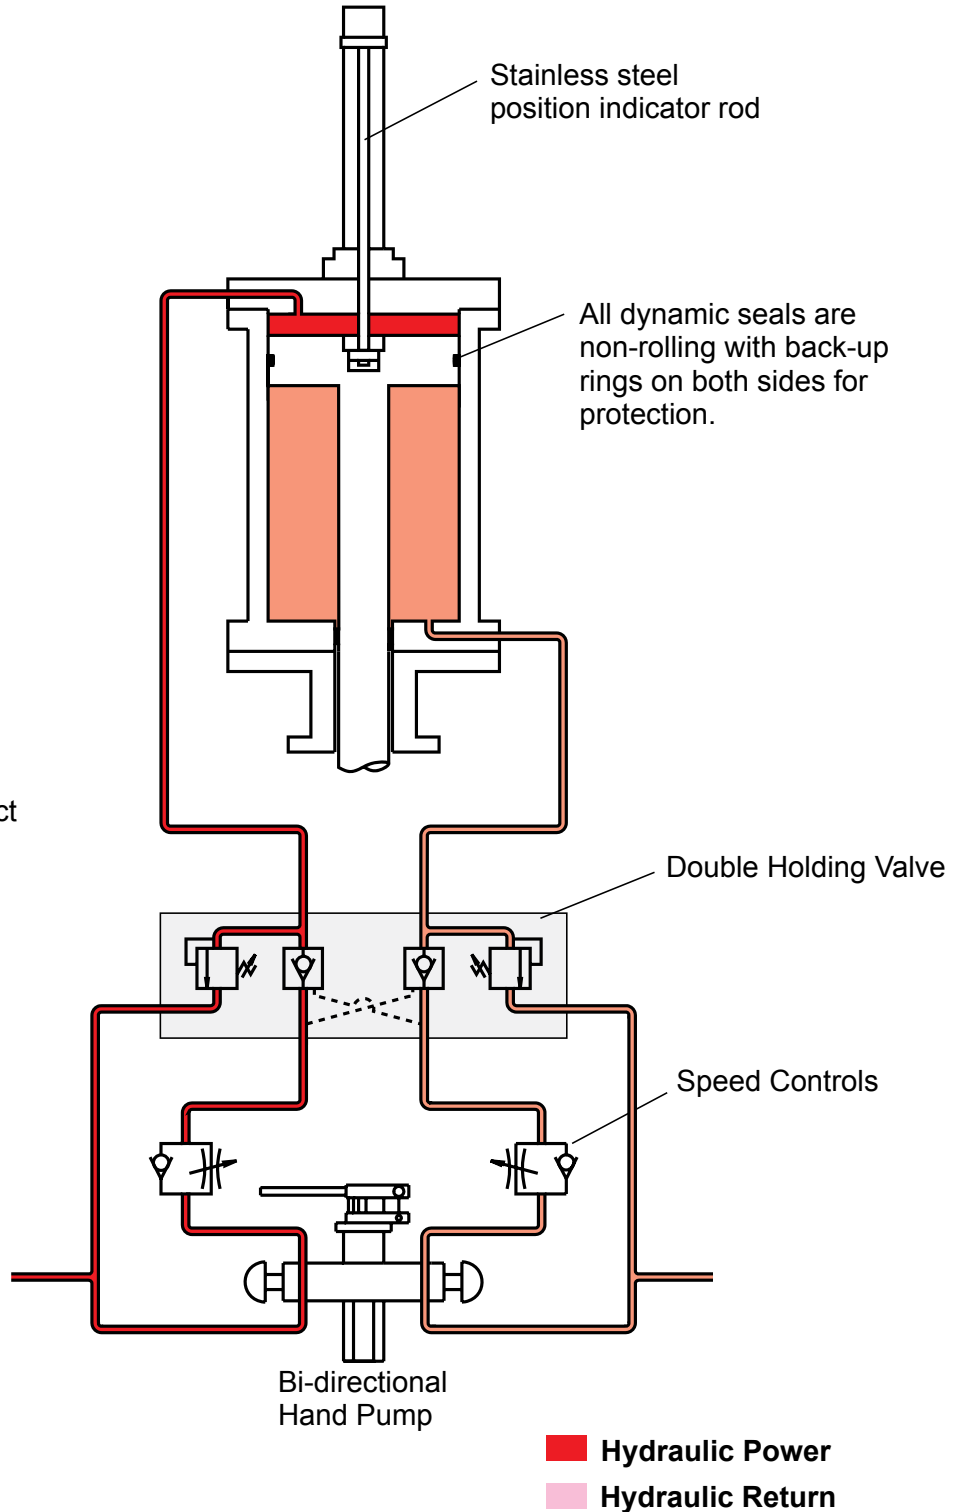

## DOUBLE HOLDING VALVE

The “Double Holding Valve” is a double pilot operated check valve combined with double thermal relief valves. To maintain precise valve position, the “Double Holding Valve” locks-in hydraulic fluid on both sides of the linear actuator piston and also provides thermal relief protection.

# CONTROLS AND ACCESSORIES

L-Series linear actuators can be operated locally, remotely, or automatically by a variety of sensory and control devices. Shafer has developed over 4000 individual control systems to meet the many requirements of our customers.

- Manual hydraulic hand pump for emergency operation.
- Poppet type, positive seal, control valves.
- Double holding control valve.
- Hydraulic snubbers.
- Adjustable speed controls.
- Limit Switches.

**Contact Us: Emerson Process Management, Valve Automation facilities at your nearest location:**

## *North & South America*

18703 GH Circle  
PO Box 508  
Waller, Texas 77484  
USA  
T +1 281 727 5300  
F +1 281 727 5353

2500 Park Avenue West  
Mansfield, Ohio 44906  
USA  
T +1 419 529 4311  
F +1 419 529 3688

9009 King Palm Drive  
Tampa, Florida 33619  
USA  
T +1 813 630 2255  
F +1 813 630 9449

4112-91A Street  
Edmonton, Alberta T6E5V2  
Canada  
T +1 780 450 3600  
F +1 780 450 1400

Av. Hollingsworth,325  
Iporanga  
Sorocaba, SP 18087-105  
Brazil  
T +55 15 3238 3788  
F +55 15 3228 3300

## *Europe*

Asveldweg 11  
7556 BT Hengelo(O)  
The Netherlands  
T +31 74 256 1010  
F +31 74 291 0938

Siemensring 112  
D-47877 Willich  
Germany  
T +49 2154 499 660  
F +49 2154 499 6613

25, Rue de Villeneuve  
Silic - BP 40434  
94583 RUNGIS, France  
T +33 1 49 79 73 00  
F +33 1 49 79 73 99

6 Bracken Hill  
South West Industrial Estate  
Peterlee, Co Durham  
SR82LS, United Kingdom  
T +44 191 518 0020  
F +44 191 518 0032

3 Furze Court  
114 Wickham Road  
Fareham, Hampshire  
PO167SH, United Kingdom  
T +44 132 984 8900  
F +44 132 984 8901

## *Middle East & Africa*

2 Monteer Road, Isando  
Kempton Park, 1600  
South Africa  
T +27 11 974 3336  
F +27 11 974 7005

PO Box 17033  
Jebel Ali Free Zone  
Dubai,  
United Arab Emirates  
T +971 4883 5235  
F +971 4883 5312

## *Asia Pacific*

9 Gul Road  
#01-02 Singapore 629361  
T +65 6501 4600  
F +65 6268 0028

9/F Gateway Building  
No.10 Ya Bao Road  
Chaoyang District  
Beijing, P.R. China  
T +86 10 5821 1188  
F +86 10 5821 1100

No 15 Xing Wang Road  
Wuqing Development Area  
Tianjin 301700  
P.R. China  
T +86 22 8212 3300  
F +86 22 8212 3308

Lot 13111, Mukim Labu,  
Kawasan Perindustrian Nilai  
71807 Nilai, Negeri Sembilan  
Malaysia  
T +60 6 799 2323  
F +60 6 799 9942

471 Mountain Highway  
Bayswater, Victoria 3153  
Australia  
T +61 3 9721 0200  
F +61 3 9720 0588

301, Solitaire Corporate Park  
151, M.V. Road, Andheri(E)  
Mumbai-400093,  
Maharashtra, India  
T +91 22 6694 2711  
F +91 22 2825 3394

NOF Shinagawa Konan Building  
1-2-5, Higashi-shinagawa  
Shinagawa-Ku, Tokyo  
140-0002 Japan  
T +81 3 5769 6873  
F +81 3 5769 6902

© 2009 Emerson Process Management. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. "Brand mark listing" are marks of one of the Emerson Process Management family of companies. All other marks are property of their respective owners.

The contents of this publication are presented for information purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

[www.ShaferValve.com](http://www.ShaferValve.com)

E-mail: [info.shafer@EmersonProcess.com](mailto:info.shafer@EmersonProcess.com)

Bulletin L-01293

**Shafer**<sup>™</sup>

  
**EMERSON**<sup>™</sup>  
Process Management